

A

Anchors—Application & Drilling Information A-45, A-46

B**Bolts**

ASTM and SAE Specifications, Proof Loads & Tensile Strengths.....	A-14
Carriage.....	A-19
Elevator	A-18
Heavy Hex	A-16
Plow	A-18
Square Head.....	A-17
Step.....	A-18
Structural-Grip Ranges	A-15

C

Cotter Pins A-30

D

Dowel Pins A-32
Drive Screws—Type U A-30

H

Heat-Treated Alloy Studs, Bolts & Threaded Bars A-4
Hex Head Cap Screws A-16
High-Strength Dimensional Data—Bolts, Nuts & Washers..... A-5
Hole Guide..... A-48

L

Lag Screws A-17
Length Tolerances for Screws..... A-20

M

Machine Screws
 Binding Head A-21
 Fillister Head A-22
 Flat Head A-23
 Flat Head Undercut A-24
 Oval Head..... A-25
 Pan Head..... A-26
 Round Head..... A-27
 Truss Head A-28

Mechanical Requirements—Bolts, Screws, SEMS, Studs, & U-Bolts A-3

Metric

Bolts, Hex Head	A-39
Cap Screws, Hex Head	A-39
Conversion Guide.....	A-35
Machine Screws, Flat Head	A-40
Machine Screws, Oval Head	A-41
Machine Screws, Pan Head	A-42
Nuts, Hex.....	A-36

Metric (Continued)

Nuts, Jam	A-36
Socket Screws, Button Head.....	A-44
Socket Screws, Flat Head.....	A-43
Socket Screws, Socket Head Cap.....	A-43
Socket Set Screws	A-44
Tap Drill Guide	A-50
Thread and Din Information	A-34
Washers, External Tooth Lock	A-38
Washers, Flat	A-37
Washers, Internal Tooth Lock	A-38
Washers, Split Lock	A-37

N**Nuts**

Hex Nut Markings and Properties.....	A-7
Machine Screw-Hex & Square	A-8
Square, Regular	A-8
Finished Hex.....	A-9
Heavy Hex	A-9
Jam	A-10
"K" Lock.....	A-11

S

Self-Drilling Screws A-26
Shoulder Screws A-33

Socket Screws

Button Head	A-31
Flat Head	A-32
Shoulder	A-33
Socket Head Cap	A-31
Socket Set	A-33

Stainless Steel Specifications A-47

Studs, Threaded A-6

T

Tap Drill Guide A-49

Tapping Screws

Flat Head	A-23
Oval Head.....	A-25
Pan Head.....	A-26

Thumb Screws A-29

Tightening Torque—Bolts, Nuts & Screws A-2

W**Washers**

External Tooth Lock	A-13
Internal Tooth Lock	A-13
Internal/External Tooth Lock	A-13
SAE Flat	A-11
Split Lock	A-12
USS Flat	A-11

Wood Screws

Flat head	A-23
Oval Head.....	A-25
Round Head.....	A-27

TIGHTENING TORQUE FOR SCREWS, BOLTS AND NUTS**TORQUE COEFFICIENTS - K**

Bolt Size	Theoretical ¹ K	Measured K (Average)	
		High-Point Torque	Mid-Point Torque
1/4-20	0.210	0.243	0.267
1/4-28	0.205	0.216	0.231
5/16-18	0.210	0.206	0.186
5/16-24	0.205	0.194	0.183
3/8-16	0.204	0.200	0.247
3/8-24	0.198	0.192	0.234
7/16-14	0.205	0.217	0.224
7/16-20	0.200	0.194	0.190
1/2-13	0.201	0.205	0.158
1/2-20	0.195	0.167	0.205
9/16-12	0.198	0.194	0.214
9/16-18	0.193	0.196	0.207
5/8-11	0.199	0.178	0.196
5/8-18	0.193	0.183	0.175
3/4-10	0.194	0.169	0.172
3/4-16	0.189	0.170	0.180
7/8-9	0.194	0.181	0.194
7/8-14	0.189	0.171	0.178
1-8	0.193	0.188	0.204
1-14	0.188	0.161	0.167
Average	0.198	0.191	0.201

¹ Computed with coefficient of friction of 0.15 and the dimensions of American National Standard Hex Nuts.

TORQUE COEFFICIENTS - COMPUTED

Size	Hex Nut				Hex Cap Screw (Finished Hex Bolt)	Heavy Hex Screw
	K ₁	K ₂	K ₃	K		
1/4-20	0.1055	0.0753	0.0318	0.213	0.213	0.223
1/4-28	0.1055	0.0786	0.0227	0.207	0.207	0.218
5/16-18	0.0993	0.0766	0.0284	0.204	0.204	0.213
5/16-24	0.0993	0.0790	0.0212	0.200	0.200	0.208
3/8-16	0.0950	0.0772	0.0265	0.199	0.199	0.213
3/8-24	0.0950	0.0802	0.0176	0.193	0.193	0.207
7/16-14	0.0980	0.0772	0.0260	0.201	0.196	0.207
7/16-20	0.0980	0.0800	0.0181	0.196	0.190	0.202
1/2-13	0.0950	0.0780	0.0245	0.198	0.198	0.208
1/2-20	0.0950	0.0811	0.0159	0.192	0.192	0.203
9/16-12	0.0970	0.0781	0.0235	0.199	0.195	0.202
9/16-18	0.0970	0.0811	0.0157	0.194	0.191	0.197
5/8-11	0.0950	0.0783	0.0231	0.196	0.196	0.205
5/8-18	0.0950	0.0816	0.0141	0.191	0.191	0.199
3/4-10	0.0950	0.0790	0.0212	0.195	0.195	0.203
3/4-16	0.0950	0.0819	0.0132	0.190	0.190	0.198
7/8-9	0.0950	0.0793	0.0201	0.194	0.194	0.201
7/8-14	0.0950	0.0819	0.0130	0.190	0.190	0.196
1-8	0.0950	0.0795	0.0199	0.194	0.194	0.200
1-14	0.0950	0.0826	0.0109	0.189	0.189	0.194
Average	-	-	-	0.197	0.196	0.205

NOTE : K₁ + K₂ + K₃ = K

**MECHANICAL REQUIREMENTS FOR BOLTS, SCREWS,
STUDS, SEMS, AND U-BOLTS**

Grade Designation	Products	Nominal Size Dia, In.	Full-Size Bolts, Screws, Studs, SEMS, Proof Load (Stress), psi	Full Size Bolts, Screws, Studs, SEMS, Tensile Strength (Stress) Min, psi	Machine Test Specimens of Bolts, Screws and Studs Yield Strength (Stress) Min, psi	Machine Test Specimens of Bolts, Screws and Studs Tensile Strength (Stress) Min, psi	Surface Hardness Rockwell 30N Max	Core Hardness Rockwell Min	Core Hardness Rockwell Max	Grade Identification Marking
1	Bolts, Screws, Studs	1/4 thru 1-1/2	33,000	60,000	36,000	60,000	—	B70	B100	None
2	Bolts, Screws, Studs	1/4 thru 3/4	55,000	74,000	57,000	74,000	—	B80	B100	None
		Over 3/4 thru 1-1/2	33,000	60,000	36,000	60,000	—	B70	B100	
4	Studs	1/4 thru 1-1/2	65,000	115,000	100,000	115,000	—	C22	C32	None
5	Bolts, Screws, Studs	1/4 thru 1	85,000	120,000	92,000	120,000	54.50	C25	C34	
		Over 1 thru 1-1/2	74,000	105,000	81,000	105,000		C19	C30	
5.1	SEMS	No.4 thru 5/8	85,000	120,000	—	—	59.5	C25	C40	
5.2	Bolts, Screws	1/4 thru 1	85,000	120,000	92,000	120,000	56	C26	C36	
8	Bolts, Screws, Studs	1/4 thru 1-1/2	120,000	150,000	130,000	150,000	58.6	C33	C39	
8.1	Studs	1/4 thru 1-1/2	120,000	150,000	130,000	150,000	58.6	C33	C39	None
8.2	Bolts, Screws	1/4 thru 1	120,000	150,000	130,000	150,000	58.6	C33	C39	

HEAT-TREATED ALLOY STUDS, BOLTS AND THREADED BARS

Chemical Composition, heat-treated, alloy steel studs

Elements	A354 Grades BC, BD		A193 Grade B7	
	† See note below		Chromium-Molybdenum (AISI 4140, 4142, 4145)	
	Range Percent	Check variation over percent	Range Percent	Check variation over or under percent
Carbon	—	—	• 0.38-0.48	0.02
Manganese	—	—	0.75-1.00	0.04
Phosphorus, max	0.04	0.005	0.04	0.005 over
Sulphur, max	0.04	0.005	0.04	0.005 over
Silicon	—	—	0.20-0.35	0.02
Chromium	—	—	0.80-1.10	0.05
Molybdenum	—	—	0.15-0.25	0.02

Tensile Requirements, heat-treated, alloy steel studs

Grade	Diameter Inches	Min tempering temp F	Tensile strength min psi	Yield point min psi	Elongation in 2" min pct	Reduction of area min pct
A354 Grade BC	2 1/2 and under	850	125,000	109,000	16	50
	Over 2 1/2 to 4 incl	850	115,000	99,000	16	45
A354 Grade BD	1 1/2 and under	850	150,000	125,000	14	35
A193 Grade B7 Chromium-Molybdenum	2 1/2 and under	1100	125,000	105,000	16	50
	Over 2 1/2 to 4 incl	1100	115,000	95,000	16	50
	Over 4 to 7 incl	1100	100,000	75,000	18	50
A193 Grade B16 Chromium-Molybdenum-Vanadium	2 1/2 and under	1200	125,000	105,000	18	50
	Over 2 1/2 to 4 incl	1200	110,000	95,000	17	45
	Over 4 to 7 incl	1200	100,000	85,000	16	45
A320 Grade L7 Chromium-Molybdenum	2 1/2 and under	—	125,000	105,000	16	50
A320 Grade L43 Nickel-Chromium-Molybdenum	4 and under	—	125,000	105,000	16	50

Elements	A193 Grade B16 Chromium-Molybdenum-Vanadium		
	Range Percent	Check variation over or under percent	
Carbon	0.35-0.44	0.02	
Manganese	0.45-0.70	0.03	
Phosphorus, max	0.04	0.005 over	
Sulphur, max	0.04	0.005 over	
Silicon	0.20-0.35	0.02	
Chromium	0.80-1.15	0.05	
Molybdenum	0.50-0.65	0.03	
Vanadium	0.25-0.35	0.03	

Elements	A320 Grade L7 Chromium-Molybdenum (AISI 4140, 4142, 4145)		A320 Grade L43 Nickel-Chromium-Molybdenum (AISI 4340)	
	Range Percent	Check variation over or under percent	Range Percent	Check variation over or under percent
Carbon	• 0.38-0.48	0.02	0.38-0.43	0.02
Manganese	0.75-1.00	0.04	0.60-0.85	0.03
Phosphorus, max	0.04	0.005 over	0.04	0.005 over
Sulphur, max	0.04	0.005 over	0.04	0.005 over
Silicon	0.20-0.35	0.02	0.20-0.35	0.02
Nickel	—	—	1.65-2.00	0.05
Chromium	0.80-1.10	0.05	0.70-0.90	0.03
Molybdenum	0.15-0.25	0.02	0.20-0.30	0.02

• For bar sizes over 3 1/2" to 4" inclusive, the carbon content may be 0.50 pct. max.

† Any alloy steel capable of meeting the tensile requirements of specification A354 may be used.

Commonly used are the following grades of heat-treated alloy steel for high pressure or extreme temperature service in diameters of 1/2" to 2", inclusive. Other grades and other diameters are available on special order.

ASTM A354, Grades BC and BD- heat-treated alloy steels for applications at normal atmospheric temperatures where high strength is required.

ASTM A193, Grade B7- a heat-treated chromium-molybdenum steel widely used for medium high temperature service.

ASTM A193, Grade B16- a heat-treated chromium molybdenum-vanadium steel for high-pressure, high-temperature service.

ASTM A320, Grade L7- This grade is intended for low-temperature service down to minus 150°F and has a minimum Charpy impact value of 15 ft-lb at this temperature. Sizes 2 1/2" and under.

ASTM A320, Grade L43- The same properties offered by Grade L7 in sizes up to 2 1/2" are obtainable up to 4" in Grade L43.

Heat-treated alloy steel bolts and threaded bars are also available from Bethlehem in the grades listed above-bolts in diameters of 3/8" to 1 1/4", inclusive; bars in diameters of 1/2" to 2", inclusive.

These are available only on special order.

TECHNICAL INFORMATION

A-5

HIGH-STRENGTH STRUCTURAL BOLTS, NUTS AND WASHERS

Bolt Dimensional Standards ANSI B18.21

Nominal Size of Basic Bolt Dia.	E		F			G		H			R			L _T (Ref)	Y (Ref)	Runout of Bearing Surface FIR
	Body Dia.		Width Across Flats			Width Across Corners		Height			Radius of Fillet		Thread Length	Transition Thread Length		
	Max	Min	Basic	Max	Min	Max	Min	Basic	Max	Min	Max	Min	Basic	Max	Max	Max
1/2	0.5000	0.515	0.482	7/8	0.875	0.850	1.010	0.969	5/16	0.323	0.302	0.031	0.009	1.00	0.19	0.016
5/8	0.6250	0.642	0.605	1 1/16	1.062	1.031	1.227	1.175	25/64	0.403	0.378	0.062	0.021	1.25	0.22	0.019
3/4	0.7500	0.768	0.729	1 1/4	1.250	1.212	1.443	1.383	15/32	0.483	0.455	0.062	0.021	1.38	0.25	0.022
7/8	0.8750	0.895	0.852	1 7/16	1.438	1.394	1.660	1.589	35/64	0.563	0.531	0.062	0.031	1.50	0.28	0.025
1	1.0000	1.022	0.976	1 5/8	1.625	1.575	1.876	1.796	35/64	0.627	0.591	0.093	0.062	1.75	0.31	0.028
1 1/8	1.1250	1.149	1.098	1 13/16	1.812	1.756	2.093	2.002	11/16	0.718	0.658	0.093	0.062	2.00	0.34	0.032
1 1/4	1.2500	1.277	1.223	2	2.000	1.938	2.309	2.209	25/32	0.813	0.749	0.093	0.062	2.00	0.38	0.035
1 5/8	1.3750	1.404	1.345	2 3/16	2.188	2.119	2.526	2.416	27/32	0.878	0.810	0.093	0.062	2.25	0.44	0.038
1 1/2	1.5000	1.531	1.470	2 3/8	2.375	2.300	2.742	2.622	15/16	0.974	0.902	0.093	0.062	2.25	0.44	0.041

Washer Dimensions

Bolt Size E	Circular Washers					Square or Rectangular Beveled Washers for American Standard Beams and Channels			
	Nominal Outside Diameter	Nominal Diameter Of Hole	Thickness			Minimum Side Dimension	Mean Thickness	Slope or Taper in Thickness	
			Min	Max					
1/2	1 1/16	17/32	0.097	0.177		1 3/4	5/16	1.6	
5/8	1 1/4	11/16	0.122	0.177		1 3/4	5/16	1.6	
3/4	1 1/2	13/16	0.122	0.177		1 3/4	5/16	1.6	
7/8	1 3/4	15/16	0.136	0.177		1 3/4	5/16	1.6	
1	2	1 1/8	0.136	0.177		1 3/4	5/16	1.6	
1 1/8	2 1/4	1 1/4	0.136	0.177		2 1/4	5/16	1.6	
1 1/4	2 1/2	1 3/8	0.136	0.177		2 1/4	5/16	1.6	
1 3/8	2 3/4	1 1/2	0.136	0.177		2 1/4	5/16	1.6	
1 1/2	3	1 5/8	0.136	0.177		2 1/4	5/16	1.6	

Washer Dimensions Tolerance (inches)



Dimension	Washer Size	To 1 1/2 In. Nominal Bolt Size, Incl.	
		In. Nominal Bolt Size, Incl.	
Nominal diameter of hole		-0: + 1/32	
Nominal outside dimensions		-1/32: + 1/4	
Flatness: max. deviation from straight edge placed on "cut" side shall not exceed		0.01	
Butt shall not project above immediately adjacent washer surface more than		0.01	

Nut Dimensions

Nut Size In Inches	Inches	
	Heavy Hex Nuts	
	Width across flats F	Height, G
1/2	7/8	21/64
5/8	1 1/16	35/64
3/4	1 5/16	47/64
7/8	1 7/16	55/64
1	1 5/8	63/64
1 1/8	1 13/16	1 7/64
1 1/4	2	1 7/32
1 3/8	2 3/16	1 11/32
1 1/2	2 3/8	1 15/32

TYPES OF STUDS

CONTINUOUS THREAD STUDS

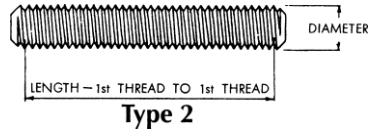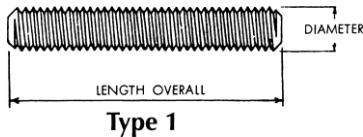


Continuous-thread studs are threaded from end to end and are often used for flange bolting with two nuts applied.

Type 1-General purpose. The length of this type is measured from end to end. Threads are UNRC-2A.

Type 2-Studs for temperature-pressure piping. These studs are made to the dimensional standard requirements of ANS B16.5 and have a length measurement requirement different from all other studs, i.e., the length is measured from first thread to first thread, exclusive of points. Points are flat and chamfered. Threads are UNRC-2A for all sizes 1" and under and 8UNR-2A for all sizes over 1".

TAP-END STUDS

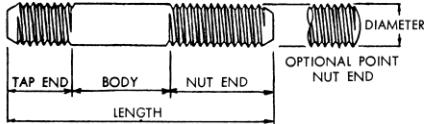

Tap-end studs have a short thread on one end called the tap end which is threaded to a Class NC5 or Class UNRC-3A fit. This end is for screwing into a tapped hole. The other or nut end is threaded with a Class UNRC-2A fit. Length of the stud is measured overall. The tap end has a chamfered point, but the nut end may have either a chamfered or round point, at the manufacturer's option. Tap-end studs are available in four types, as follows:


Type 1-Unfinished, have a full diameter but no standard body tolerances.

Type 2-Finished, having either an undersize body with rolled threads or a full-size body with cut threads, at the manufacturer's option. The body portion will be finished to a minimum Class 2A pitch diameter or maximum basic major diameter of the nut-end thread.

Type 3-Finished full-body, having tolerances equal to that on major diameter of Class 2A threads.

Type 4-Finished close-body, milled or ground to tolerances specified by the user.

DOUBLE-END STUDS

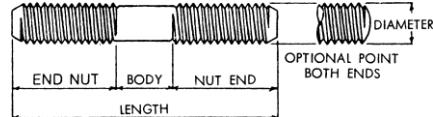





Double-end studs have equal-length threads on each end to accommodate a nut and are threaded to a Class 2Afit. Length of stud is measured overall. Both ends have chamfered points, but round points may be furnished on either or both ends at the manufacturer's option. This style is furnished in the same four types listed for tap-end studs. Double-end studs are used for flange bolting or other applications where torquing from both ends is necessary or desirable.

Most steel grades not heat treated or quenched and tempered can be furnished on special order for production quantities. Only the Type 2 continuous thread studs made to specification ASTMA193 grade B7 are stocked in a full range of sizes.

HEX NUT MARKINGS AND PROPERTIES
ASTM A194
Grade 2, 2H, 4 and 7
(Mechanical Properties)
AN Standard B18.2.2
(Dimensions)

For high-temperature, high-pressure in combination with alloy studs and bolts.

These nuts are tapped UNC-2B in sizes of 1" and under or BUN-2B over 1".

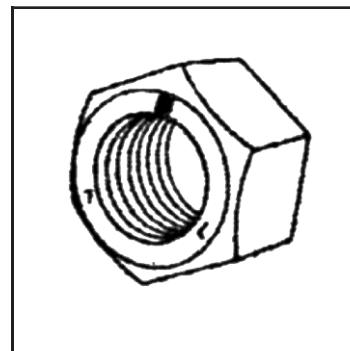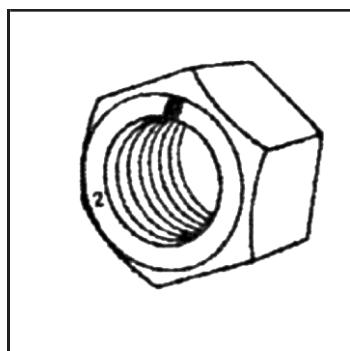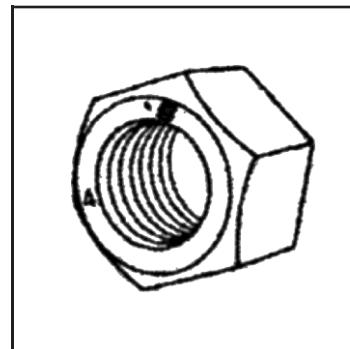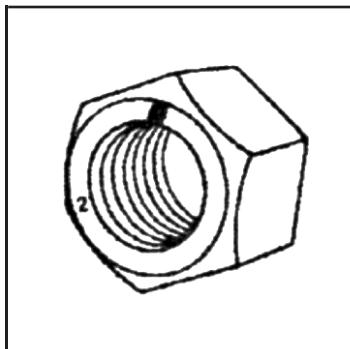

ASTMA194 - GRADE 2

Treated nuts suitable for moderate temperature and pressure conditions.

ASTMA194 - GRADE 2H

Quenched nuts suitable for high-temperature and high-pressure conditions.


ASTMA194 - GRADES 4 and 7

Heat-treated carbon-molybdenum and chromium molybdenum steel nuts suitable for severe temperature and pressure conditions.

Chemical Composition							
Grade	C	Mn	P	S	Si	Mo	Cr
2 and 2H min	0.40	—	0.04 max	0.05 max	—	—	—
4 to 0.50	0.40 to 0.50	0.70 to 0.90	0.035 max	0.04 max	0.20 to 0.35	0.20 to 0.30	—
7 to 0.48	0.38 to 0.48	0.75 to 1.00	0.04 max	0.04 max	0.20 to 0.35	0.15 to 0.25	0.80 to 1.10


Hardness Requirements			
Grade	Brinell	Rockwell B	Rockwell C
2	159 to 352	84 min.	—
2H	248 to 352	—	24 to 38
4 and 7	248 to 352	—	24 to 38

SQUARE AND HEX MACHINE SCREW NUTS

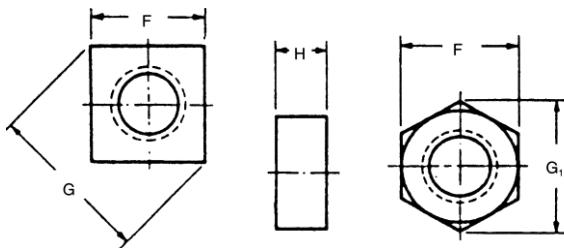


Nominal Size or Basic Thread Diameter	F			G		G ₁		H	
	Width Across Flats			Width Across Corners		Hex		Thickness	
	Basic	Max	Min	Max	Min	Max	Min	Max	Min
2 0.0860	3/16	0.188	0.180	0.265	0.247	0.217	0.205	0.066	0.057
3 0.0990	3/16	0.188	0.180	0.265	0.247	0.217	0.205	0.066	0.057
4 0.1120	1/4	0.250	0.241	0.354	0.331	0.289	0.275	0.098	0.087
5 0.1250	5/16	0.312	0.302	0.442	0.415	0.361	0.344	0.114	0.102
6 0.1380	5/16	0.312	0.302	0.442	0.415	0.361	0.344	0.114	0.102
8 0.1640	11/32	0.344	0.332	0.486	0.456	0.397	0.378	0.130	0.117
10 0.1900	3/8	0.375	0.362	0.530	0.497	0.433	0.413	0.130	0.117
12 0.2160	7/16	0.438	0.423	0.619	0.581	0.505	0.482	0.161	0.148
1/4 0.2500	7/16	0.438	0.423	0.619	0.581	0.505	0.482	0.193	0.178
5/16 0.3125	9/16	0.562	0.545	0.795	0.748	0.650	0.621	0.225	0.208
3/8 0.3750	5/8	0.625	0.607	0.884	0.833	0.722	0.692	0.257	0.239

REGULAR SQUARE NUTS

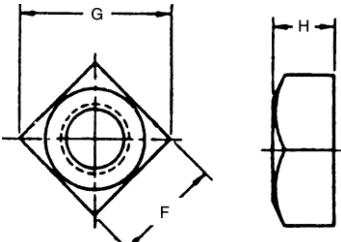


Nominal Size or Basic Major Thread Diameter	F			G		H		
	Width Across Flats			Width Across Corners		Thickness		
	Basic	Max	Min	Max	Min	Basic	Max	Min
1/4 0.2500	7/16	0.438	0.425	0.619	0.584	7/32	0.235	0.203
5/16 0.3125	9/16	0.562	0.547	0.795	0.751	17/64	0.283	0.249
3/8 0.3750	5/8	0.625	0.606	0.884	0.832	21/64	0.346	0.310
7/16 0.4375	3/4	0.750	0.728	1.061	1.000	3/8	0.394	0.356
1/2 0.5000	13/16	0.812	0.788	1.149	1.082	7/16	0.458	0.418
5/8 0.6250	1	1.000	0.969	1.414	1.330	35/64	0.569	0.525
3/4 0.7500	1-1/8	1.125	1.088	1.591	1.494	21/32	0.680	0.632
7/8 0.8750	1-5/16	1.312	1.269	1.856	1.742	49/64	0.792	0.740
1 1.0000	1-1/2	1.500	1.450	2.121	1.991	7/8	0.903	0.847

FINISHED HEX NUTS

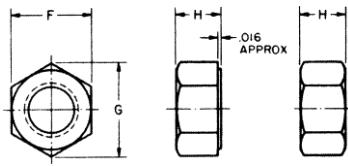

Nominal Size or Basic Major Thread Diameter	F			G		H		
	Width Across Flats			Width Across Corners		Thickness Hex Nuts		
	Basic	Max	Min	Max	Min	Basic	Max	Min
1/4 0.2500	7/16	0.438	0.428	0.505	0.488	7/32	0.226	0.212
5/16 0.3125	1/2	0.500	0.489	0.577	0.557	17/64	0.273	0.258
3/8 0.3750	9/16	0.562	0.551	0.650	0.628	21/64	0.337	0.320
7/16 0.4375	11/16	0.688	0.675	0.794	0.768	3/8	0.385	0.365
1/2 0.5000	3/4	0.750	0.736	0.866	0.840	7/16	0.448	0.427
9/16 0.5625	7/8	0.875	0.861	1.010	0.982	31/64	0.496	0.473
5/8 0.6250	15/16	0.938	0.922	1.083	1.051	35/64	0.559	0.535
3/4 0.7500	1 1/8	1.125	1.088	1.299	1.240	41/64	0.665	0.617
7/8 0.8750	15/16	1.312	1.269	1.516	1.447	3/4	0.776	0.724
1 1.0000	1 1/2	1.500	1.450	1.732	1.653	55/64	0.887	0.831
1 1/8 1.1250	1 11/16	1.688	1.631	1.949	1.859	31/32	0.999	0.939
1 1/4 1.2500	1 7/8	1.875	1.812	2.165	2.066	1 1/16	1.094	1.030
1 3/8 1.3750	2 1/16	2.062	1.994	2.382	2.273	1 11/64	1.206	1.138
1 1/2 1.5000	2 1/4	2.250	2.175	2.598	2.480	1 9/32	1.317	1.245

HEAVY HEX NUTS

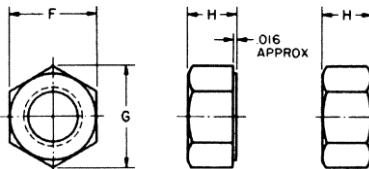

Nominal Size or Basic Major Thread Diameter	F			G		H		
	Width Across Flats			Width Across Corners		Thickness Heavy Hex Nuts		
Basic	Max	Min	Max	Min	Basic	Max	Min	
1/4 0.2500	1/2	0.500	0.488	0.577	0.556	15/64	0.250	0.218
5/16 0.3125	9/16	0.562	0.546	0.650	0.622	19/64	0.314	0.280
3/8 0.3750	11/16	0.688	0.669	0.794	0.763	23/64	0.377	0.341
7/16 0.4375	3/4	0.750	0.728	0.866	0.830	27/64	0.441	0.403
1/2 0.5000	7/8	0.875	0.850	1.010	0.969	31/64	0.504	0.464
9/16 0.5625	15/16	0.938	0.909	1.083	1.037	35/64	0.568	0.526
5/8 0.6250	1 1/16	1.062	1.031	1.227	1.175	39/64	0.631	0.587
3/4 0.7500	1 1/4	1.250	1.212	1.443	1.382	47/64	0.758	0.710
7/8 0.8750	1 7/16	1.438	1.394	1.660	1.589	55/64	0.885	0.833
1 1.0000	1 5/8	1.625	1.575	1.876	1.796	63/64	1.012	0.956
1 1/8 1.1250	1 13/16	1.812	1.756	2.093	2.002	17/64	1.139	1.079
1 1/4 1.2500	2	2.000	1.938	2.309	2.209	17/32	1.251	1.187
1 3/8 1.3750	2 3/16	2.188	2.119	2.526	2.416	111/32	1.378	1.310
1 1/2 1.5000	2 3/8	2.375	2.300	2.742	2.622	115/32	1.505	1.433
1 5/8 1.6250	2 9/16	2.562	2.481	2.959	2.828	119/32	1.632	1.556
1 3/4 1.7500	2 3/4	2.750	2.662	3.175	3.035	123/32	1.759	1.679
1 7/8 1.8750	2 15/16	2.938	2.844	3.392	3.242	127/32	1.886	1.802
2 2.0000	3 1/8	3.125	3.025	3.608	3.449	131/32	2.013	1.925
2 1/4 2.2500	3 1/2	3.500	3.388	4.041	3.862	213/64	2.251	2.155
2 1/2 2.5000	3 7/8	3.875	3.750	4.474	4.275	229/64	2.505	2.401
2 3/4 2.7500	4 1/4	4.250	4.112	4.907	4.688	245/64	2.759	2.647
3 3.0000	4 5/8	4.625	4.475	5.340	5.102	261/64	3.013	2.893
3 1/4 3.2500	5	5.000	4.838	5.774	5.515	33/16	3.252	3.124
3 1/2 3.5000	5 3/8	5.375	5.200	6.207	5.928	37/16	3.506	3.370
3 3/4 3.7500	5 3/4	5.750	5.562	6.640	6.341	311/16	3.760	3.616
4 4.0000	6 1/8	6.125	5.925	7.073	6.755	315/16	4.014	3.862


JAM NUTS - HEX AND HEAVY HEX

ASTM A307

Double-chamfered hex nuts are offered with UNC-2B or UNF-2B threads in diameters ranging from 1/4" to 1" inclusive.

Heavy hex jam nuts are available with UNC-2B threads, double-chamfered in diameters of 1/4" to 1" inclusive, or washer-faced in diameters of 1-1/8" to 2" inclusive.


Hex jam nut dimensions (in.) ANSI B18.2.2

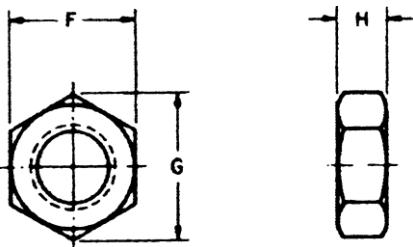

Hex Jam Nut, double-chamfered


Nominal Size or Basic Major Diam of Thread	Width Across Flats			Width Across Corners		Thickness Hex Jam Nuts		
	Basic	Max	Min	Max	Min	Basic	Max	Min
1/4 0.2500	7/16	0.438	0.428	0.505	0.488	5/32	0.163	0.150
5/16 0.3125	1/2	0.500	0.489	0.577	0.557	3/16	0.195	0.180
3/8 0.3750	9/16	0.562	0.551	0.650	0.628	7/32	0.227	0.210
7/16 0.4375	11/16	0.688	0.675	0.794	0.768	1/4	0.260	0.240
1/2 0.5000	3/4	0.750	0.736	0.866	0.840	5/16	0.323	0.302
9/16 0.5625	7/8	0.875	0.861	1.010	0.982	5/16	0.324	0.301
5/8 0.6250	15/16	0.938	0.922	1.083	1.051	3/8	0.387	0.363
3/4 0.7500	1 1/8	1.125	1.088	1.299	1.240	27/64	0.446	0.398
7/8 0.8750	1 5/16	1.312	1.269	1.516	1.447	31/64	0.510	0.458
1 1.0000	1 1/2	1.500	1.450	1.732	1.853	35/64	0.575	0.518

Heavy hex jam nut dimensions (in.) ANSI B18.2.2

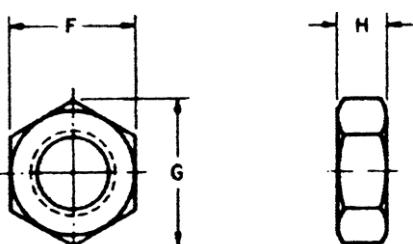


Heavy Hex Jam Nut, washer-faced and double-chamfered

Nominal Size or Basic Major Diam of Thread	Width Across Flats			Width Across Corners		Thickness Heavy Hex Jam Nuts		
	Basic	Max	Min	Max	Min	Basic	Max	Min
1/4 0.2500	1/2	0.500	0.488	0.577	0.556	11/64	0.188	0.156
5/16 0.3125	9/16	0.562	0.546	0.650	0.622	13/64	0.220	0.186
3/8 0.3750	11/16	0.688	0.669	0.794	0.763	15/64	0.252	0.216
7/16 0.4375	3/4	0.750	0.728	0.866	0.830	17/64	0.285	0.247
1/2 0.5000	7/8	0.875	0.850	1.010	0.969	19/64	0.317	0.277
9/16 0.5625	15/16	0.938	0.909	1.083	1.037	21/64	0.349	0.307
5/8 0.6250	1 1/16	1.062	1.031	1.227	1.175	23/64	0.381	0.337
3/4 0.7500	1 1/4	1.250	1.212	1.443	1.382	27/64	0.446	0.398
7/8 0.8750	1 7/16	1.438	1.394	1.660	1.589	31/64	0.510	0.458
1 1.0000	1 5/8	1.625	1.575	1.876	1.796	35/64	0.575	0.519
1 1/8 1.1250	1 13/16	1.812	1.756	2.093	2.002	39/64	0.639	0.579
1 1/4 1.2500	2	2.000	1.938	2.309	2.209	23/32	0.751	0.687
1 3/8 1.3750	2 3/16	2.188	2.119	2.526	2.416	25/32	0.815	0.747
1 1/2 1.5000	2 3/8	2.375	2.300	2.742	2.622	27/32	0.880	0.808
1 5/8 1.6250	2 9/16	2.562	2.481	2.959	2.828	29/32	0.944	0.868
1 3/4 1.7500	2 3/4	2.750	2.662	3.175	3.035	31/32	1.009	0.929
1 7/8 1.8750	2 15/16	2.938	2.844	3.392	3.242	1 1/16	1.073	0.989
2 2.0000	3 1/8	3.125	3.025	3.608	3.449	13/32	1.138	1.050

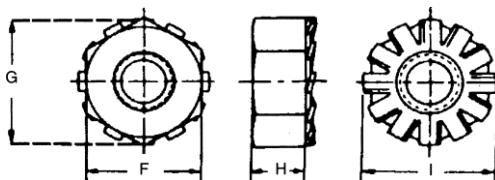"K" LOCK NUTS

Nominal Size or Basic Thread Diameter	F			G		H		I	
	Width Across Flats			Width Across Corners		Thickness		Washer Diameter Ref	
	Basic	Max	Min	Max	Min	Max	Min		
4	0.1120	1/4	0.250	0.241	0.289	0.275	0.098	0.087	0.281
6	0.1380	5/16	0.312	0.302	0.361	0.344	0.114	0.102	0.344
8	0.1640	11/32	0.344	0.332	0.397	0.378	0.130	0.117	0.375
10	0.1900	3/8	0.375	0.362	0.433	0.413	0.130	0.117	0.406
1/4	0.2500	7/16	0.438	0.423	0.505	0.482	0.193	0.178	0.500
5/16	0.3125	1/2	0.500	0.489	0.577	0.557	0.273	0.258	0.578
3/8	0.3750	9/16	0.562	0.551	0.650	0.628	0.385	0.365	0.656


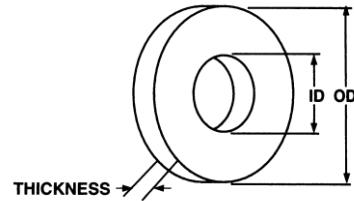
FLAT WASHERS**SAE WASHERS**

Bolt Size	Inches		Gauge	Est. Pcs. per 1 lb.	Wt. per M pcs.
	I.D.	O.D.			
#4	1/8	5/16	#21 (1/32)	1650	0.6
#6	5/32	3/8	#18 (3/64)	790	1.26
#8	3/16	7/16	#18 (3/64)	585	1.7
#10	7/32	1/2	#18 (3/64)	435	2.3
#12	1/4	9/16	#16 (1/16)	280	3.7
1/4	9/32	5/8	#16 (1/16)	222	4.5
5/16	11/32	11/16	#16 (1/16)	192	5.2
3/8	13/32	13/16	#16 (1/16)	140	7.2
7/16	15/32	59/64	#16 (1/16)	105	9.5
1/2	17/32	1 1/16	#13 (3/32)	55	18.3
9/16	19/32	1 3/16	#13 (3/32)	43	23.4
5/8	21/32	1 5/16	#13 (3/32)	36	27.7
3/4	13/16	1 1/2	#10 (9/64)	21	47.4
7/8	15/16	1 3/4	#10 (9/64)	16	63
1	1 1/16	2	#10 (9/64)	12	83
1 1/8	1 3/16	2 1/4	#10 (9/64)	9.2	109
1 1/4	1 5/16	2 1/2	#9 (5/32)	6.3	160
1 3/8	1 7/16	2 3/4	#9 (5/32)	5.25	190
1 1/2	1 9/16	3	#9 (5/32)	4.25	240



USS STANDARD WASHERS

Bolt Size	Inches		Gauge	Est. Pcs. per 1 lb.	Wt. per M pcs.
	I.D.	O.D.			
3/16	1/4	9/16	#18 (3/64)	361	2.8
1/4	5/16	3/4	#16 (1/16)	149	6.7
5/16	3/8	7/8	#14 (5/64)	87	11.5
3/8	7/16	1	#14 (5/64)	67	14.9
7/16	1/2	1 1/4	#14 (5/64)	41	24.4
1/2	9/16	1 3/8	#12 (7/64)	26	38.5
9/16	5/8	1 1/2	#12 (7/64)	22	45.5
5/8	11/16	1 3/4	#10 (9/64)	13	77
3/4	13/16	2	#9 (5/32)	9.1	110
7/8	15/16	2 1/4	#8 (11/64)	6.5	153
1	1 1/16	2 1/2	#8 (11/64)	5.3	188
1 1/8	1 3/16	2 3/4	#8 (11/64)	4.5	220
1 1/4	1 3/8	3	#8 (11/64)	3.8	260
1 3/8	1 1/2	3 1/4	#7 (3/16)	3.0	333
1 1/2	1 5/8	3 1/2	#7 (3/16)	2.6	385
1 5/8	1 3/4	3 3/4	#7 (3/16)	2.3	448
1 3/4	1 7/8	4	#7 (3/16)	2.0	500
1 7/8	2	4 1/4	#7 (3/16)	1.8	569
2	2 1/8	4 1/2	#7 (3/16)	1.6	630
2 1/4	2 3/8	4 3/4	#5 (7/32)	1.2	826

SPLIT LOCK WASHERS

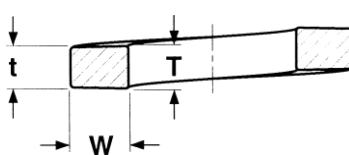MEDIUM SPLIT
HELICAL SPRING
LOCK WASHERS


Nominal Washer Size	A		B	W	$\frac{T^2 t}{2}$
	Inside Diameter		Outside Diameter Max ²	Width Min	Washer Section
	Min	Max			Thickness Min
2	0.086	0.088	0.094	0.172	0.035
4	0.112	0.115	0.121	0.209	0.040
5	0.125	0.128	0.134	0.236	0.047
6	0.138	0.141	0.148	0.250	0.047
8	0.164	0.168	0.175	0.293	0.055
10	0.190	0.194	0.202	0.334	0.062
12	0.216	0.221	0.229	0.377	0.070
1/4	0.250	0.255	0.263	0.489	0.109
5/16	0.312	0.318	0.328	0.586	0.125
3/8	0.375	0.382	0.393	0.683	0.141
7/16	0.438	0.446	0.459	0.779	0.156
1/2	0.500	0.509	0.523	0.873	0.171
9/16	0.562	0.572	0.587	0.971	0.188
5/8	0.625	0.636	0.653	1.079	0.203
3/4	0.750	0.763	0.783	1.271	0.234
7/8	0.875	0.890	0.912	1.464	0.266
1	1.000	1.017	1.042	1.661	0.297
1 1/6	1.062	1.080	1.107	1.756	0.312
1 1/8	1.125	1.144	1.172	1.853	0.328
1 3/16	1.188	1.208	1.237	1.950	0.344
1 1/4	1.250	1.271	1.302	2.045	0.359
1 1/2	1.500	1.525	1.561	2.430	0.422
					0.375

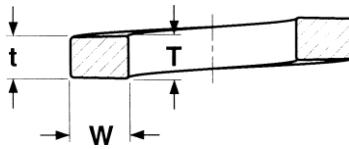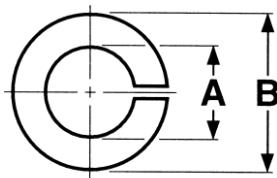HI-COLLAR
HELICAL SPRING
LOCK WASHERS

Nominal Washer Size	A		B	W	$\frac{T^2 t}{2}$
	Inside Diameter		Outside Diameter Max ²	Width Min	Washer Section
	Min	Max			Thickness Min
4	0.112	0.115	0.121	0.173	0.022
6	0.138	0.141	0.148	0.216	0.030
8	0.164	0.168	0.175	0.267	0.042
10	0.190	0.194	0.202	0.294	0.042
1/4	0.250	0.255	0.263	0.365	0.047
5/16	0.312	0.318	0.328	0.460	0.062
3/8	0.375	0.382	0.393	0.553	0.076
					0.125


INTERNAL TOOTH LOCK WASHERS

Nominal Washer Size	A Inside Diameter		B Outside Diameter		C Thickness	
	Min	Max	Max	Min	Max	Min
No. 2 0.086	0.089	0.095	0.200	0.175	0.015	0.010
No. 4 0.112	0.115	0.123	0.270	0.255	0.019	0.015
No. 6 0.138	0.141	0.150	0.295	0.275	0.021	0.017
No. 8 0.164	0.168	0.176	0.340	0.325	0.023	0.018
No. 10 0.190	0.195	0.204	0.381	0.365	0.025	0.020
No. 12 0.216	0.221	0.231	0.410	0.394	0.025	0.020
1/4 0.250	0.256	0.267	0.478	0.460	0.028	0.023
5/16 0.312	0.320	0.332	0.610	0.594	0.034	0.028
3/8 0.375	0.384	0.398	0.692	0.670	0.040	0.032
7/16 0.438	0.448	0.464	0.789	0.740	0.040	0.032
1/2 0.500	0.512	0.530	0.900	0.867	0.045	0.037
5/8 0.625	0.640	0.663	1.071	1.045	0.050	0.042




EXTERNAL TOOTH LOCK WASHERS

Nominal Washer Size	A Inside Diameter		B Outside Diameter		C Thickness	
	Inside Diameter		Outside Diameter		Thickness	
	Min	Max	Max	Min	Max	Min
No. 4 0.112	0.115	0.123	0.260	0.245	0.019	0.015
No. 6 0.138	0.141	0.150	0.320	0.305	0.022	0.016
No. 8 0.164	0.168	0.176	0.381	0.365	0.023	0.018
No. 10 0.190	0.195	0.204	0.410	0.395	0.025	0.020
No. 12 0.216	0.221	0.231	0.475	0.460	0.028	0.023
1/4 0.250	0.256	0.267	0.510	0.494	0.028	0.023
5/16 0.312	0.320	0.332	0.610	0.588	0.034	0.028
3/8 0.375	0.384	0.398	0.694	0.670	0.040	0.032
7/16 0.438	0.448	0.464	0.760	0.740	0.040	0.032
1/2 0.500	0.513	0.530	0.900	0.880	0.045	0.037
5/8 0.625	0.641	0.663	1.070	1.045	0.050	0.042



COMBINATION INTERNAL-EXTERNAL TOOTH LOCK WASHERS

Nominal Washer Size	A Inside Diameter		B Outside Diameter		C Thickness	
	Inside Diameter		Outside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
6 0.138	0.150	0.141	0.510	0.495	0.028	0.023
8 0.164	0.176	0.168	0.506	0.494	0.028	0.023
8 0.164	0.176	0.168	0.610	0.580	0.034	0.028
10 0.190	0.204	0.195	0.610	0.580	0.034	0.028
1/4 0.250	0.267	0.256	0.760	0.725	0.040	0.032
5/16 0.312	0.332	0.320	0.900	0.865	0.040	0.032
3/8 0.375	0.398	0.384	0.985	0.965	0.045	0.037
7/16 0.438	0.464	0.448	1.070	1.045	0.050	0.042
1/2 0.500	0.530	0.512	1.260	1.220	0.055	0.047
5/8 0.625	0.663	0.640	1.410	1.380	0.060	0.052



IDENTIFICATION MARKINGS ON BOLT HEADS

ASTM and SAE Standards


Specifications, Proof Loads, Tensile Strengths

Grade Marking	Specification	Material	Bolt and Screw Size In	Proof Load psi	Tensile Strength min psi
	SAE-J429 Grade 1	Low or Medium Carbon Steel	1/4 thru 1 1/2	33,000	60,000
	ASTM-A307		1/4 thru 4		60,000
	SAE-J429 Grade 2	Low or Medium Carbon Steel	1/4 thru 1/4 Over 3/4 thru 1 1/2	55,000 33,000	74,000 60,000
	SAE-J429 Grade 5	Medium Carbon Steel Quenched and Tempered	1/4 thru 1 Over 1 thru 1 1/4	85,000 74,000	120,000 105,000
	ASTM-A449		1/4 thru 1 Over 1 thru 1 1/2 Over 1 1/2 thru 3	85,000 74,000 55,000	120,000 105,000 90,000
	*ASTM-A325 Type 1	Medium Carbon Steel Quenched and Tempered	1/2 thru 1 1/2 Over 1 thru 1 1/2	85,000 74,000	120,000 105,000
	*ASTM-A32b Type 2	Low Carbon Martensite Steel Quenched and Tempered	1/2 thru 1	85,000	120,000
	ASTM-A325 Type 3	Weather Resistant Steel Quenched and Tempered	1 1/8 thru 1 1/2 1/2 thru 1	74,000 85,000	105,000 120,000
	ASTM-A354 Grade BB	Low Alloy Steel Quenched and Tempered	1/4 thru 2 1/2 Over 2 1/4 thru 4	80,000 75,000	105,000 100,000
	ASTM-A354 Grade BC	Low Alloy Steel Quenched and Tempered	1/4 thru 4 Over 2 1/2 thru 4	105,000 95,000	125,000 115,000
	SAE-J429 GRADE B	Medium Carbon Alloy Steel Quenched and Tempered	1/4 thru 1 1/4	120,000	150,000
	ASTM-A354 Grade BD	Low Alloy Steel Quenched and Tempered			
	ASTM-A490	Alloy Steel Quenched and Tempered	1/2 thru 1 1/2	120,000	150,000

* Radial Lines on Type 1 bolts are optional to manufacturer. On Type 2 bolts radial lines 60 degrees apart are required.


Bolt head markings include manufacturers identity symbols.

SQUARE HEAD BOLTS

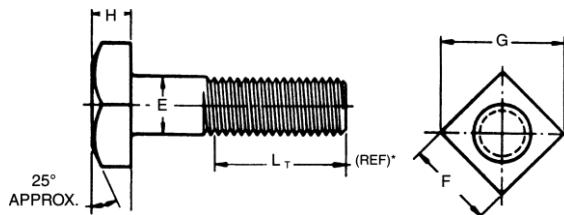

Nominal Size or Basic Bolt Dia.	E Body Dia	F Width Across Flats			G Width Across Corners		H Height			L_T(Ref) Thread Length For Bolt Lengths	
		Max	Basic	Max	Min	Max	Min	Basic	Max	Min	Less Than 6"
1/4	0.260	3/8	0.375	0.362	0.530	0.498	11/64	0.188	0.156	0.750	1.000
5/16	0.324	1/2	0.500	0.484	0.707	0.665	13/64	0.220	0.186	0.875	1.125
3/8	0.388	9/16	0.562	0.544	0.795	0.747	1/4	0.268	0.232	1.000	1.250
7/16	0.452	5/8	0.625	0.603	0.884	0.828	19/64	0.316	0.278	1.125	1.375
1/2	0.515	3/4	0.750	0.725	1.061	0.995	21/64	0.348	0.308	1.250	1.500
5/8	0.642	15/16	0.938	0.906	1.326	1.244	27/64	0.444	0.400	1.500	1.750
3/4	0.768	1 1/8	1.125	1.088	1.591	1.494	1/2	0.524	0.476	1.750	2.000
7/8	0.895	1 5/16	1.312	1.269	1.856	1.742	19/32	0.620	0.568	2.000	2.250
1	1.022	1 1/2	1.500	1.450	2.121	1.991	21/32	0.684	0.628	2.250	2.500
1 1/8	1.149	1 11/16	1.688	1.631	2.386	2.239	3/4	0.780	0.720	2.250	2.750
1 1/4	1.277	1 7/8	1.875	1.812	2.652	2.489	27/32	0.876	0.812	2.750	3.000
1 3/8	1.404	2 1/16	2.062	1.994	2.917	2.738	29/32	0.940	0.872	3.000	3.250
1 1/2	1.531	2 1/4	2.250	2.175	3.182	2.986	1	1.036	0.964	3.250	3.500


HEX HEAD LAG SCREWS

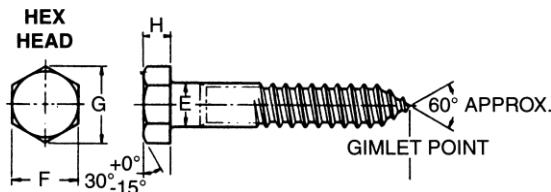

Nominal Size or Basic Product Dia	E		F			G		H			Threads per Inch	
	Body or Shoulder Dia.		Width Across Flats			Hex Lag Screws						
						Width Across Corners		Height				
	Max	Min	Basic	Max	Min	Max	Min	Basic	Max	Min		
No. 10	0.199	0.178	9/32	0.281	0.271	0.323	0.309	1/8	0.140	0.110	11	
1/4	0.260	0.237	3/8	0.375	0.362	—	—	—	—	—	10	
1/4 **	0.260	0.237	7/16	0.438	0.425	0.505	0.484	11/64	0.188	0.150	10	
5/16	0.324	0.298	1/2	0.500	0.484	0.577	0.552	7/32	0.235	0.195	9	
3/8	0.388	0.360	9/16	0.562	0.544	0.650	0.620	1/4	0.268	0.226	7	
7/16	0.452	0.421	5/8	0.625	0.603	0.722	0.687	19/64	0.316	0.272	7	
1/2	0.515	0.482	3/4	0.750	0.725	0.866	0.826	11/32	0.364	0.302	6	
5/8	0.642	0.605	15/16	0.938	0.906	1.083	1.033	27/64	0.444	0.378	5	
3/4	0.768	0.729	1 1/8	1.125	1.088	1.299	1.240	1/2	0.524	0.455	4 1/2	
7/8	0.895	0.852	1 15/16	1.312	1.269	1.516	1.447	37/64	0.604	0.531	4	
1	1.022	0.976	1 1/2	1.500	1.450	1.732	1.653	43/64	0.700	0.591	3 1/2	
1 1/8	1.149	1.098	1 11/16	1.688	1.631	1.949	1.859	3/4	0.780	0.658	3 1/4	
1 1/4	1.277	1.223	1 7/8	1.875	1.812	2.165	2.066	27/32	0.876	0.749	3 1/4	

** Hex Lag Screw


STEP BOLTS

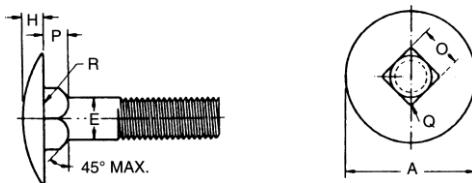

Nominal Size ¹ or Basic Bolt Diameter	E		A		H		O		P		Q	R
	Body Diameter		Head Diameter		Head Height		Square Width		Square Depth		Corner Radius on Square	Fillet Radius
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max
No.10	0.199	0.182	0.656	0.625	0.114	0.094	0.199	0.185	0.125	0.094	0.031	0.031
1/4	0.260	0.237	0.844	0.813	0.145	0.125	0.260	0.245	0.156	0.125	0.031	0.031
5/16	0.324	0.298	1.031	1.000	0.176	0.156	0.324	0.307	0.187	0.156	0.031	0.031
3/8	0.388	0.360	1.249	1.188	0.208	0.188	0.388	0.368	0.219	0.188	0.047	0.031
7/16	0.452	0.421	1.406	1.375	0.239	0.219	0.452	0.431	0.250	0.219	0.047	0.031
1/2	0.515	0.483	1.594	1.563	0.270	0.250	0.515	0.492	0.281	0.250	0.047	0.031

¹ Where specifying nominal size in decimals, zeros preceding decimal and in the fourth decimal place shall be omitted.


ELEVATOR BOLTS

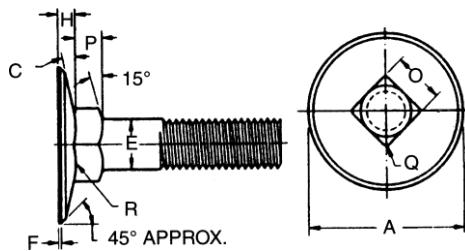

Nominal Size ¹ or Basic Bolt Diameter	E		A			C	F	H		O		P	Q	R	
	Body Diameter		Head Diameter			Head Angle	Flat on Min Dia. Head	Head Height		Square Width		Square Depth		Corner Radius On Square	Fillet Radius
			Max Edge Sharp	Min Edge Sharp	Min Edge Flat			Ref	Max	Max	Min	Max	Min		
	Max	Min												Max	Max
No.10	0.199	0.182	0.790	0.750	0.740	9°	0.025	0.082	0.062	0.210	0.185	0.125	0.094	0.031	0.031
1/4	0.260	0.237	1.080	0.969	0.938	9°	0.035	0.098	0.078	0.280	0.245	0.219	0.188	0.031	0.031
5/16	0.324	0.298	1.227	1.188	1.157	9°	0.035	0.114	0.094	0.342	0.307	0.250	0.219	0.031	0.031
3/8	0.388	0.360	1.352	1.312	1.272	11°	0.040	0.145	0.125	0.405	0.368	0.250	0.219	0.047	0.031
7/16	0.452	0.421	1.477	1.438	1.397	13°	0.040	0.176	0.156	0.468	0.431	0.281	0.250	0.047	0.031
1/2	0.515	0.483	1.602	1.562	1.532	12°	0.040	0.176	0.156	0.530	0.492	0.281	0.250	0.047	0.031

¹ Where specifying nominal size in decimals, zeroes preceding decimal and in the fourth decimal place shall be omitted.

NO. 3 HEAD PLOW BOLTS

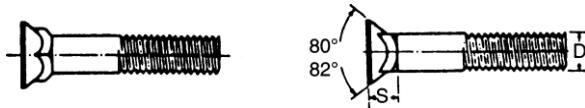

Nominal Diameter of Bolt	A			Feed Thickness Max	S		B		
	Diameter of Head				Depth of Square and Head		Width of Square		
	Max	Min Sharp	Abs. Min. With Flat		Max	Min	Max	Min (Basic)	
3/8	0.708	0.671	0.656	0.031	0.312	0.281	0.387	0.375	
7/16	0.826	0.781	0.766	0.036	0.364	0.328	0.450	0.438	
1/2	0.945	0.890	0.875	0.042	0.417	0.375	0.515	0.500	
5/8	1.147	1.094	1.063	0.050	0.506	0.456	0.640	0.625	

CARRIAGE BOLTS

ASTM A307


Grade A

Carriage bolts with UNRC-2A threads can be furnished in two different styles: square-neck carriage bolts in diameters from 1/4" to 3/4", inclusive and short square-neck carriage bolts in diameters from 1/4" to 5/8" inclusive.

Dimensional data for both styles are shown below.

MINIMUM THREAD LENGTH

The formula for determining thread length is, Bolts 6" and shorter, 2 diameters plus 1/4". Bolts over 6" 2 diameters plus 1/2". If bolts are too short to apply the formula, the thread will be extended as close to head as possible.

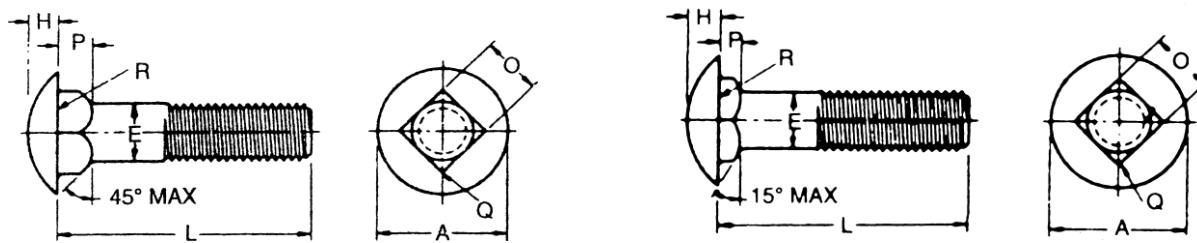

Square-neck carriage bolt dimensions (in.) ANSI B18.5

Nominal Size or Basic Bolt Diameter	Body Diameter		Head Diameter		Head Height		Square Width		Square Depth		Corner Radius on Square	Fillet Radius
	E		A		H		O		P		Q	R
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max
	0.1900	0.199	0.182	0.469	0.438	0.144	0.094	0.199	0.185	0.125	0.094	0.031
1/4	0.2500	0.260	0.237	0.594	0.563	0.145	0.125	0.260	0.245	0.156	0.125	0.031
5/16	0.3125	0.324	0.298	0.719	0.688	0.176	0.156	0.324	0.307	0.187	0.156	0.031
3/8	0.3750	0.388	0.360	0.844	0.782	0.208	0.188	0.388	0.368	0.219	0.188	0.047
7/16	0.4375	0.452	0.421	0.969	0.907	0.239	0.219	0.452	0.431	0.250	0.219	0.047
1/2	0.5000	0.515	0.483	1.094	1.032	0.270	0.250	0.515	0.492	0.281	0.250	0.047
5/8	0.6250	0.642	0.605	1.344	1.219	0.344	0.313	0.642	0.616	0.344	0.313	0.078
3/4	0.7500	0.768	0.729	1.594	1.469	0.406	0.375	0.768	0.741	0.406	0.375	0.078


Full size body bolts are furnished unless user specifies undersize body bolts.

Short Square-neck carriage bolt dimensions (in.) ANSI B18.5

Nominal Size or Basic Bolt Diameter	Body Diameter		Head Diameter		Head Height		Square Width		Square Depth		Corner Radius on Square	Fillet Radius
	E		A		H		O		P		Q	R
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max
1/4	0.2500	0.260	0.213	0.594	0.563	0.145	0.125	0.260	0.245	0.124	0.093	0.031
5/16	0.3125	0.324	0.272	0.719	0.688	0.176	0.156	0.324	0.307	0.124	0.093	0.031
3/8	0.3750	0.388	0.329	0.844	0.782	0.208	0.188	0.388	0.368	0.156	0.125	0.047
7/16	0.4375	0.452	0.385	0.969	0.907	0.239	0.219	0.452	0.431	0.156	0.125	0.047
1/2	0.5000	0.515	0.444	1.094	1.032	0.270	0.250	0.515	0.492	0.156	0.125	0.047
5/8	0.6250	0.642	0.559	1.344	1.219	0.344	0.313	0.642	0.616	0.218	0.187	0.062


Undersize body bolts are furnished unless user specifies full-size body bolts.

LENGTH TOLERANCES MACHINE SCREWS




Nominal Screw Size	0 thru 12	1/4 thru 3/4
Nominal Screw Length	Tolerance on Length	
Up to 1/2", Incl.	-0.02	-0.03
Over 1/2" to 1", Incl.	-0.03	-0.03
Over 1" to 2", Incl.	-0.06	-0.06
Over 2"	-0.09	-0.09

WOOD SCREWS

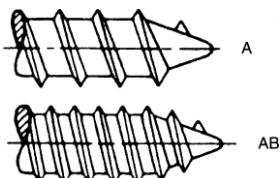


Nominal Screw Length	Tolerance on Length
Up to 5/8", Incl.	-0.03
Over 5/8" to 1 1/2", Incl.	-0.05
Over 1 1/2" to 2 3/4", Incl.	-0.06
Over 2 3/4" to 5", Incl.	-0.09

TYPE A - AB

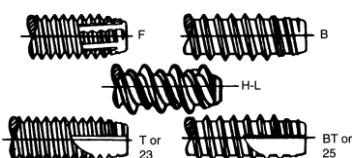

Nominal Screw Length	Tolerance on Length
Up to 1", Incl.	± 0.03
Over 1"	± 0.05

TYPE B, F, H - L, 25 and 23



Nominal Screw Length	Tolerance on Length
Up to 3/4", Incl.	-0.03
Over 3/4" to 1 1/2", Incl.	-0.05

TYPE U




Nominal Screw Length	Tolerance on Length
Up to 3/8", Incl.	± 0.02
Over 3/8"	± 0.03

FILLISTER HEAD MACHINE SCREWS


Basic Screw Diameter	A Head Diameter		H Head Side Height		O Total Head Height		J Slot Width		T Slot Depth	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
0000	0.038	0.032	0.019	0.011	0.025	0.015	0.008	0.004	0.012	0.006
000	0.059	0.053	0.029	0.021	0.035	0.027	0.012	0.006	0.017	0.011
00	0.082	0.072	0.037	0.028	0.047	0.039	0.017	0.010	0.022	0.015
0	0.096	0.083	0.043	0.038	0.055	0.047	0.023	0.016	0.025	0.015
1	0.118	0.104	0.053	0.045	0.066	0.058	0.026	0.019	0.031	0.020
2	0.140	0.124	0.062	0.053	0.083	0.066	0.031	0.023	0.037	0.025
3	0.161	0.145	0.070	0.061	0.095	0.077	0.035	0.027	0.043	0.030
4	0.183	0.166	0.079	0.069	0.107	0.088	0.039	0.031	0.048	0.035
5	0.205	0.187	0.088	0.078	0.120	0.100	0.043	0.035	0.054	0.040
6	0.226	0.208	0.096	0.086	0.132	0.111	0.048	0.039	0.060	0.045
8	0.270	0.250	0.113	0.102	0.156	0.133	0.054	0.045	0.071	0.054
10	0.313	0.292	0.130	0.118	0.180	0.156	0.060	0.050	0.083	0.064
12	0.357	0.334	0.148	0.134	0.205	0.178	0.067	0.056	0.094	0.074
1/4	0.414	0.389	0.170	0.155	0.237	0.207	0.075	0.064	0.109	0.087
5/16	0.518	0.490	0.211	0.194	0.295	0.262	0.084	0.072	0.137	0.110
3/8	0.622	0.590	0.253	0.233	0.355	0.315	0.094	0.081	0.164	0.133
7/16	0.625	0.589	0.265	0.242	0.368	0.321	0.094	0.081	0.170	0.135
1/2	0.750	0.710	0.297	0.273	0.412	0.362	0.106	0.091	0.190	0.151
9/16	0.812	0.768	0.336	0.308	0.466	0.410	0.118	0.102	0.214	0.172
5/8	0.875	0.827	0.375	0.345	0.521	0.461	0.133	0.116	0.240	0.193
3/4	1.000	0.945	0.441	0.406	0.612	0.542	0.149	0.131	0.281	0.226

Basic Screw Diameter	M Recess Diameter		G Recess Depth		N Recess Width Min	Driver Size
	Max	Min	Max	Min		
0	0.067	0.054	0.039	0.021	0.013	0
1	0.074	0.061	0.045	0.025	0.014	0
2	0.104	0.091	0.059	0.041	0.017	1
3	0.112	0.099	0.068	0.050	0.019	1
4	0.122	0.109	0.078	0.060	0.019	1
5	0.143	0.130	0.067	0.042	0.027	2
6	0.166	0.153	0.091	0.066	0.028	2
8	0.182	0.169	0.108	0.082	0.030	2
10	0.199	0.186	0.124	0.100	0.031	2
12	0.259	0.246	0.141	0.115	0.034	3
1/4	0.281	0.268	0.161	0.135	0.036	3
5/16	0.322	0.309	0.203	0.177	0.042	3
3/8	0.389	0.376	0.233	0.210	0.065	4
7/16	0.413	0.400	0.259	0.234	0.068	4
1/2	0.435	0.422	0.280	0.255	0.071	4
9/16	0.470	0.442	0.312	0.288	0.076	4
5/8	0.587	0.564	0.343	0.314	0.081	5
3/4	0.633	0.610	0.382	0.355	0.086	5

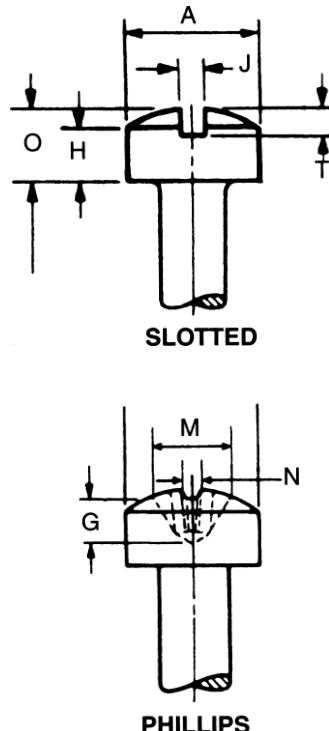


FLAT HEAD
MACHINE SCREWS
WOOD SCREWS
TAPPING SCREWS

Basic Screw Diameter	A		H	J		T	
	Head Diameter		Head Height Ref	Slot Width		Slot Depth	
	Max Edge Sharp	Min Edge Rounded or Flat		Max	Min	Max	Min
0000	0.043	0.037	0.011	0.008	0.004	0.007	0.003
000	0.064	0.058	0.016	0.011	0.007	0.009	0.005
00	0.092	0.076	0.028	0.017	0.010	0.014	0.009
0	0.119	0.099	0.035	0.023	0.016	0.015	0.010
1	0.146	0.123	0.043	0.026	0.019	0.019	0.012
2	0.172	0.147	0.051	0.031	0.023	0.023	0.015
3	0.199	0.171	0.059	0.035	0.027	0.027	0.017
4	0.225	0.195	0.067	0.039	0.031	0.030	0.020
5	0.252	0.220	0.075	0.043	0.035	0.034	0.022
6	0.279	0.244	0.083	0.048	0.039	0.038	0.024
8	0.332	0.292	0.100	0.054	0.045	0.045	0.029
10	0.385	0.340	0.116	0.060	0.050	0.053	0.034
12	0.438	0.389	0.132	0.067	0.056	0.060	0.039
1/4	0.507	0.452	0.153	0.075	0.064	0.070	0.046
5/16	0.635	0.568	0.191	0.084	0.072	0.088	0.058
3/8	0.762	0.685	0.230	0.094	0.081	0.106	0.070
7/16	0.812	0.723	0.223	0.094	0.081	0.103	0.066
1/2	0.875	0.775	0.223	0.106	0.091	0.103	0.065
9/16	1.000	0.889	0.260	0.118	0.102	0.120	0.077
5/8	1.125	1.002	0.298	0.133	0.116	0.137	0.088
3/4	1.375	1.230	0.372	0.149	0.131	0.171	0.111

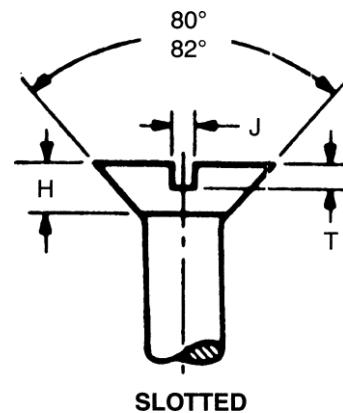



Nominal Size or Basic Screw Diameter	M Recess Diameter		G Recess Depth		N Recess Width	Driver Size
	Max	Min	Max	Min	Min	
0 0.0600	0.069	0.056	0.043	0.027	0.014	0
1 0.0730	0.077	0.064	0.051	0.035	0.015	0
2 0.0860	0.102	0.089	0.063	0.047	0.017	1
3 0.0990	0.107	0.094	0.068	0.052	0.018	1
4 0.1120	0.128	0.115	0.089	0.073	0.018	1
5 0.1250	0.154	0.141	0.086	0.063	0.027	2
6 0.1380	0.174	0.161	0.106	0.083	0.029	2
8 0.1640	0.189	0.176	0.121	0.098	0.030	2
10 0.1900	0.204	0.191	0.136	0.113	0.032	2
12 0.2160	0.268	0.255	0.156	0.133	0.035	3
1/4 0.2500	0.283	0.270	0.171	0.148	0.036	3
5/16 0.3125	0.365	0.352	0.216	0.194	0.061	4
3/8 0.3750	0.393	0.380	0.245	0.223	0.065	4
7/16 0.4375	0.409	0.396	0.261	0.239	0.068	4
1/2 0.5000	0.424	0.411	0.276	0.254	0.069	4
9/16 0.5625	0.454	0.431	0.300	0.278	0.073	4
5/8 0.6250	0.576	0.553	0.342	0.316	0.079	5
3/4 0.7500	0.640	0.617	0.406	0.380	0.087	5

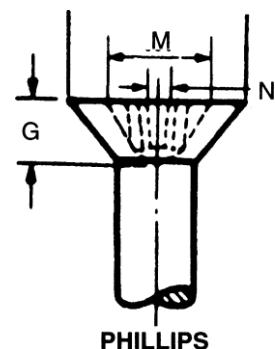

FLAT HEAD UNDERCUT MACHINE SCREWS

Nominal Size or Basic Screw Diameter	L	A		H		J		T	
		Head Diameter		Head Height		Slot Width		Slot Depth	
		Max Edge Sharp	Min Edge Rounded or Flat	Max	Min	Max	Min	Max	Min
0	1/8	0.119	0.099	0.025	0.018	0.023	0.016	0.011	0.007
1	1/8	0.146	0.123	0.031	0.023	0.026	0.019	0.014	0.009
2	1/8	0.172	0.147	0.036	0.028	0.031	0.023	0.016	0.011
3	1/8	0.199	0.171	0.042	0.033	0.035	0.027	0.019	0.012
4	3/16	0.225	0.195	0.047	0.038	0.039	0.031	0.022	0.014
5	3/16	0.252	0.220	0.053	0.043	0.043	0.035	0.024	0.016
6	3/16	0.279	0.244	0.059	0.048	0.048	0.039	0.027	0.017
8	1/4	0.332	0.292	0.070	0.058	0.054	0.045	0.032	0.021
10	5/16	0.385	0.340	0.081	0.068	0.060	0.050	0.037	0.024
12	3/8	0.438	0.389	0.092	0.078	0.067	0.056	0.043	0.028
1/4	7/16	0.507	0.452	0.107	0.092	0.075	0.064	0.050	0.032
5/16	1/2	0.635	0.568	0.134	0.116	0.084	0.072	0.062	0.041
3/8	9/16	0.762	0.685	0.161	0.140	0.094	0.081	0.075	0.049
7/16	5/8	0.812	0.723	0.156	0.133	0.094	0.081	0.072	0.045
1/2	3/4	0.875	0.775	0.156	0.130	0.106	0.091	0.072	0.046


Nominal Size or Basic Screw Diameter	M		G		Driver Size	
	Recess Diameter		Recess Depth			
	Max	Min	Max	Min	Min	
0	0.069	0.056	0.043	0.027	0.014	0
1	0.077	0.064	0.051	0.035	0.015	0
2	0.095	0.082	0.056	0.040	0.017	1
3	0.102	0.089	0.063	0.047	0.018	1
4	0.117	0.104	0.078	0.062	0.018	1
5	0.128	0.115	0.089	0.073	0.018	1
6	0.146	0.133	0.078	0.055	0.025	2
8	0.174	0.161	0.106	0.083	0.029	2
10	0.189	0.176	0.121	0.098	0.030	2
12	0.233	0.220	0.121	0.098	0.030	3
1/4	0.250	0.237	0.136	0.113	0.032	3
5/16	0.317	0.304	0.168	0.146	0.053	4
3/8	0.365	0.352	0.216	0.194	0.061	4
7/16	0.393	0.380	0.245	0.223	0.065	4
1/2	0.409	0.396	0.261	0.242	0.068	4

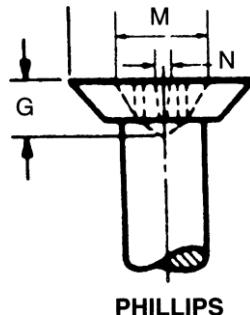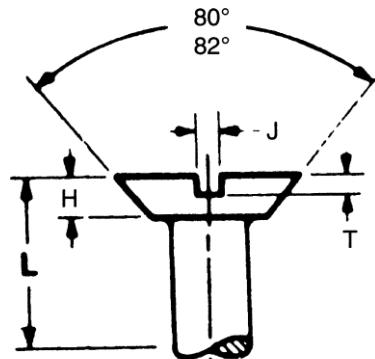

OVAL HEAD
MACHINE SCREWS
TAPPING SCREWS
WOOD SCREWS

Basic Screw Diameter	A		H	O		J		T	
	Head Diameter		Head Side Height	Total Head Height		Slot Width		Slot Depth	
	Max Edge Sharp	Min Edge Rounded or Flat		Ref	Max	Min	Max	Min	Max
00	0.093	0.083	0.028	0.042	0.034	0.017	0.010	0.023	0.016
0	0.119	0.099	0.035	0.056	0.041	0.023	0.016	0.030	0.025
1	0.146	0.123	0.043	0.068	0.052	0.026	0.019	0.038	0.031
2	0.172	0.147	0.051	0.080	0.063	0.031	0.023	0.045	0.037
3	0.199	0.171	0.059	0.092	0.073	0.035	0.027	0.052	0.043
4	0.225	0.195	0.067	0.104	0.084	0.039	0.031	0.059	0.049
5	0.252	0.220	0.075	0.116	0.095	0.043	0.035	0.067	0.055
6	0.279	0.244	0.083	0.128	0.105	0.048	0.039	0.074	0.060
8	0.332	0.292	0.100	0.152	0.126	0.054	0.045	0.088	0.072
10	0.385	0.340	0.116	0.176	0.148	0.060	0.050	0.103	0.084
12	0.438	0.389	0.132	0.200	0.169	0.067	0.056	0.117	0.096
1/4	0.507	0.452	0.153	0.232	0.197	0.075	0.064	0.136	0.112
5/16	0.635	0.568	0.191	0.290	0.249	0.084	0.072	0.171	0.141
3/8	0.762	0.685	0.230	0.347	0.300	0.094	0.081	0.206	0.170
7/16	0.812	0.723	0.223	0.345	0.295	0.094	0.081	0.210	0.174
1/2	0.875	0.775	0.223	0.354	0.299	0.106	0.091	0.216	0.176
9/16	1.000	0.889	0.260	0.410	0.350	0.118	0.102	0.250	0.207
5/8	1.125	1.002	0.298	0.467	0.399	0.133	0.116	0.285	0.235
3/4	1.375	1.230	0.372	0.578	0.497	0.149	0.131	0.353	0.293


Basic Screw Diameter	M		G		N	Driver Size
	Recess Diameter		Recess Depth		Recess Width	
	Max	Min	Max	Min	Min	
0	0.074	0.061	0.045	0.027	0.014	0
1	0.077	0.064	0.048	0.030	0.015	0
2	0.112	0.099	0.069	0.052	0.018	1
3	0.124	0.111	0.081	0.064	0.019	1
4	0.136	0.123	0.094	0.077	0.019	1
5	0.158	0.145	0.085	0.061	0.028	2
6	0.178	0.165	0.105	0.080	0.030	2
8	0.192	0.179	0.119	0.095	0.031	2
10	0.209	0.196	0.137	0.113	0.033	2
12	0.270	0.257	0.152	0.128	0.038	3
1/4	0.290	0.277	0.173	0.148	0.040	3
5/16	0.381	0.368	0.226	0.202	0.064	4
3/8	0.400	0.387	0.245	0.221	0.066	4
7/16	0.410	0.397	0.257	0.233	0.068	4
1/2	0.422	0.409	0.269	0.245	0.070	4

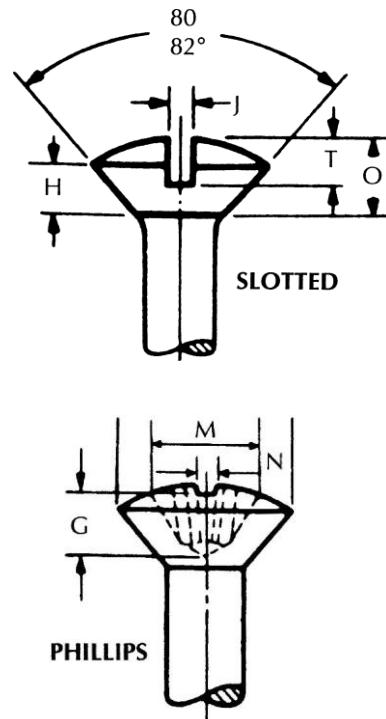


PAN HEAD

MACHINE SCREWS
TAPPING SCREWS
SELF DRILLING SCREWS

Nominal Size or Basic Screw Diameter	A		H		J		T	
	Head Diameter		Head Height (Slotted)		Slot Width		Slot Depth	
	Max	Min	Max	Min	Max	Min	Max	Min
0000	0.042	0.036	0.016	0.010	0.008	0.004	0.008	0.004
000	0.066	0.060	0.023	0.017	0.012	0.008	0.012	0.008
00	0.090	0.082	0.025	0.032	0.017	0.010	0.016	0.010
0	0.116	0.104	0.039	0.031	0.023	0.016	0.022	0.014
1	0.142	0.130	0.046	0.038	0.026	0.019	0.027	0.018
2	0.167	0.155	0.053	0.045	0.031	0.023	0.031	0.022
3	0.193	0.180	0.060	0.051	0.035	0.027	0.036	0.026
4	0.219	0.205	0.068	0.058	0.039	0.031	0.040	0.030
5	0.245	0.231	0.075	0.065	0.043	0.035	0.045	0.034
6	0.270	0.256	0.082	0.072	0.048	0.039	0.050	0.037
8	0.322	0.306	0.096	0.085	0.054	0.045	0.058	0.045
10	0.373	0.357	0.110	0.099	0.060	0.050	0.068	0.053
12	0.425	0.407	0.125	0.112	0.067	0.056	0.077	0.061
1/4	0.492	0.473	0.144	0.130	0.075	0.064	0.087	0.070
5/16	0.615	0.594	0.178	0.162	0.084	0.072	0.106	0.085
3/8	0.740	0.716	0.212	0.195	0.094	0.081	0.124	0.100
7/16	0.863	0.837	0.247	0.228	0.094	0.081	0.142	0.116
1/2	0.987	0.958	0.281	0.260	0.106	0.091	0.161	0.131
9/16	1.041	1.000	0.315	0.293	0.118	0.102	0.179	0.146
5/8	1.172	1.125	0.350	0.325	0.133	0.116	0.197	0.162
3/4	1.435	1.375	0.419	0.390	0.149	0.131	0.234	0.192




Nominal Size or Basic Screw Diameter	H		M				N	Driver Size		
	Head Height (Recessed)		Recess Diameter		Recess Depth					
	Max	Min	Max	Min	Max	Min				
0	0.044	0.036	0.067	0.054	0.039	0.021	0.013	0		
1	0.053	0.044	0.074	0.061	0.045	0.025	0.014	0		
2	0.062	0.053	0.104	0.091	0.059	0.041	0.017	1		
3	0.071	0.062	0.112	0.099	0.068	0.050	0.019	1		
4	0.080	0.070	0.122	0.109	0.078	0.060	0.019	1		
5	0.089	0.079	0.158	0.145	0.083	0.057	0.028	2		
6	0.097	0.087	0.166	0.153	0.091	0.066	0.028	2		
8	0.115	0.105	0.182	0.169	0.108	0.082	0.030	2		
10	0.133	0.122	0.199	0.186	0.124	0.100	0.031	2		
12	0.151	0.139	0.259	0.246	0.141	0.115	0.034	3		
1/4	0.175	0.162	0.281	0.268	0.161	0.135	0.036	3		
5/16	0.218	0.203	0.350	0.337	0.193	0.169	0.059	4		
3/8	0.261	0.244	0.389	0.376	0.233	0.210	0.065	4		
7/16	0.305	0.284	0.413	0.400	0.259	0.234	0.068	4		
1/2	0.348	0.325	0.435	0.422	0.280	0.255	0.071	4		
9/16	0.391	0.366	0.470	0.447	0.312	0.288	0.076	4		
5/8	0.434	0.406	0.587	0.564	0.343	0.314	0.081	5		
3/4	0.521	0.488	0.633	0.610	0.382	0.355	0.086	5		



**ROUND HEAD
MACHINE SCREWS
WOOD SCREWS**

Basic Screw Diameter	A		H		J		T	
	Head Diameter		Head Height		Slot Width		Slot Depth	
	Max	Min	Max	Min	Max	Min	Max	Min
0000	0.041	0.035	0.022	0.016	0.008	0.004	0.017	0.013
000	0.062	0.056	0.031	0.025	0.012	0.008	0.018	0.012
00	0.089	0.080	0.045	0.036	0.017	0.010	0.026	0.018
0	0.113	0.099	0.053	0.043	0.023	0.016	0.039	0.029
1	0.138	0.122	0.061	0.051	0.026	0.019	0.044	0.033
2	0.162	0.146	0.069	0.059	0.031	0.023	0.048	0.037
3	0.187	0.169	0.078	0.067	0.035	0.027	0.053	0.040
4	0.211	0.193	0.086	0.075	0.039	0.031	0.058	0.044
5	0.236	0.217	0.095	0.083	0.043	0.035	0.063	0.047
6	0.260	0.240	0.103	0.091	0.048	0.039	0.068	0.051
8	0.309	0.287	0.120	0.107	0.054	0.045	0.077	0.058
10	0.359	0.334	0.137	0.123	0.060	0.050	0.087	0.065
12	0.408	0.382	0.153	0.139	0.067	0.056	0.096	0.073
1/4	0.472	0.443	0.175	0.160	0.075	0.064	0.109	0.082
5/16	0.590	0.557	0.216	0.198	0.084	0.072	0.132	0.099
3/8	0.708	0.670	0.256	0.237	0.094	0.081	0.155	0.117
7/16	0.750	0.707	0.328	0.307	0.094	0.081	0.196	0.148
1/2	0.813	0.766	0.355	0.332	0.106	0.091	0.211	0.159
9/16	0.938	0.887	0.410	0.385	0.118	0.102	0.242	0.183
5/8	1.000	0.944	0.438	0.411	0.133	0.116	0.258	0.195
3/4	1.250	1.185	0.547	0.516	0.149	0.131	0.320	0.242


Basic Screw Diameter	M		G		Driver Size	
	Recess Diameter		Recess Depth			
	Max	Min	Max	Min		
0	0.073	0.060	0.042	0.022	0.014	0
1	0.082	0.069	0.052	0.033	0.015	0
2	0.100	0.087	0.053	0.034	0.017	1
3	0.109	0.096	0.062	0.042	0.018	1
4	0.118	0.105	0.072	0.053	0.019	1
5	0.154	0.141	0.074	0.046	0.027	2
6	0.162	0.149	0.084	0.056	0.027	2
8	0.178	0.165	0.101	0.075	0.030	2
10	0.195	0.182	0.119	0.093	0.031	2
12	0.249	0.236	0.125	0.099	0.032	3
1/4	0.268	0.255	0.147	0.121	0.034	3
5/16	0.308	0.295	0.187	0.161	0.040	3
3/8	0.387	0.374	0.228	0.202	0.064	4
7/16	0.402	0.389	0.241	0.216	0.066	4
1/2	0.416	0.403	0.256	0.231	0.068	4
9/16	0.459	0.436	0.292	0.265	0.075	4
5/8	0.554	0.531	0.318	0.277	0.077	5
3/4	0.654	0.631	0.418	0.379	0.088	5

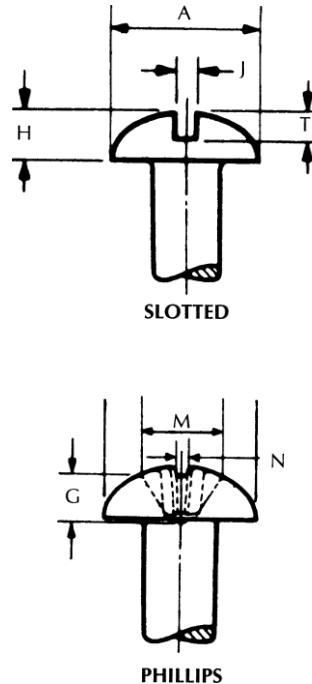


TRUSS HEAD MACHINE SCREWS

Basic Screw Diameter	A		H		J		T	
	Head Diameter		Head Height		Slot Width		Slot Depth	
	Max	Min	Max	Min	Max	Min	Max	Min
0000	0.049	0.043	0.014	0.010	0.009	0.005	0.009	0.005
000	0.077	0.071	0.022	0.018	0.013	0.009	0.013	0.009
00	0.106	0.098	0.030	0.024	0.017	0.010	0.018	0.012
0	0.131	0.119	0.037	0.029	0.023	0.016	0.022	0.014
1	0.164	0.149	0.045	0.037	0.026	0.019	0.027	0.018
2	0.194	0.180	0.053	0.044	0.031	0.023	0.031	0.022
3	0.226	0.211	0.061	0.051	0.035	0.027	0.036	0.026
4	0.257	0.241	0.069	0.059	0.039	0.031	0.040	0.030
5	0.289	0.272	0.078	0.066	0.043	0.035	0.045	0.034
6	0.321	0.303	0.086	0.074	0.048	0.039	0.050	0.037
8	0.384	0.364	0.102	0.088	0.054	0.045	0.058	0.045
10	0.448	0.425	0.118	0.103	0.060	0.050	0.068	0.053
12	0.511	0.487	0.134	0.118	0.067	0.056	0.077	0.061
1/4	0.573	0.546	0.150	0.133	0.075	0.064	0.087	0.070
5/16	0.698	0.666	0.183	0.162	0.084	0.072	0.106	0.085
3/8	0.823	0.787	0.215	0.191	0.094	0.081	0.124	0.100
7/16	0.948	0.907	0.248	0.221	0.094	0.081	0.142	0.116
1/2	1.073	1.028	0.280	0.250	0.106	0.091	0.161	0.131
9/16	1.198	1.149	0.312	0.279	0.118	0.102	0.179	0.146
5/8	1.323	1.269	0.345	0.309	0.133	0.116	0.196	0.162
3/4	1.573	1.511	0.410	0.368	0.149	0.131	0.234	0.182

Basic Screw Diameter	M Recess Diameter		G Recess Depth		N Recess Width	Driver Size
	Max	Min	Max	Min		
	Min	Max	Min	Max	Min	
0	0.063	0.050	0.037	0.019	0.013	0
1	0.071	0.058	0.045	0.027	0.014	0
2	0.104	0.091	0.059	0.041	0.018	1
3	0.110	0.097	0.066	0.049	0.018	1
4	0.112	0.099	0.069	0.051	0.018	1
5	0.128	0.115	0.085	0.067	0.019	1
6	0.158	0.145	0.084	0.059	0.027	2
8	0.173	0.160	0.099	0.074	0.029	2
10	0.188	0.175	0.115	0.090	0.030	2
12	0.248	0.235	0.128	0.103	0.032	3
1/4	0.263	0.250	0.143	0.118	0.033	3
5/16	0.352	0.339	0.193	0.168	0.059	4
3/8	0.383	0.370	0.226	0.202	0.063	4
7/16	0.414	0.401	0.257	0.232	0.068	4
1/2	0.444	0.431	0.288	0.263	0.072	4
9/16	0.451	0.428	0.302	0.278	0.074	4
5/8	0.559	0.536	0.322	0.289	0.077	5
3/4	0.620	0.597	0.384	0.352	0.085	5

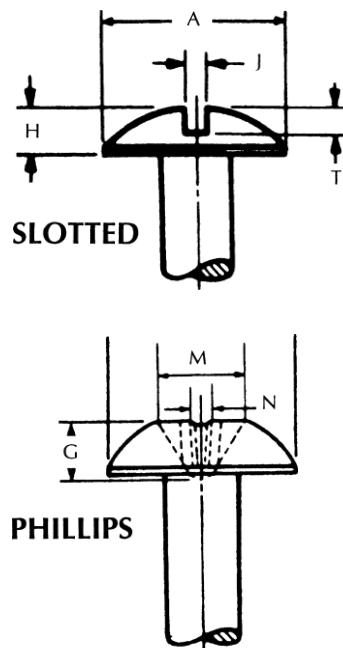


THUMB SCREWS

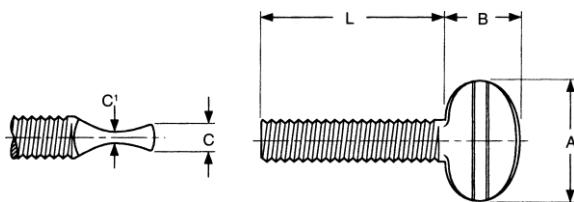

PLAIN PATTERN – TYPE P


Nominal Size or Basic Screw Diameter	Threads Per Inch	A		B		C		C ¹		L	
		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
6	32	0.45	0.43	0.28	0.26	0.08	0.06	0.03	0.02	1.00	0.25
8	32	0.51	0.49	0.32	0.30	0.09	0.07	0.04	0.02	1.00	0.38
10	24 & 32	0.58	0.54	0.39	0.36	0.10	0.08	0.05	0.03	2.00	0.38
12	24	0.71	0.67	0.45	0.43	0.11	0.09	0.05	0.03	2.00	0.38
1/4	20	0.83	0.80	0.52	0.48	0.16	0.14	0.06	0.03	2.50	0.50
5/16	18	0.96	0.91	0.64	0.60	0.17	0.14	0.09	0.06	3.00	0.50
3/8	16	1.09	1.03	0.71	0.67	0.22	0.18	0.11	0.08	3.00	0.75
7/16	14	1.40	1.35	0.96	0.91	0.27	0.24	0.14	0.11	4.00	1.00
1/2	13	1.54	1.46	1.09	1.03	0.33	0.29	0.15	0.11	4.00	1.00

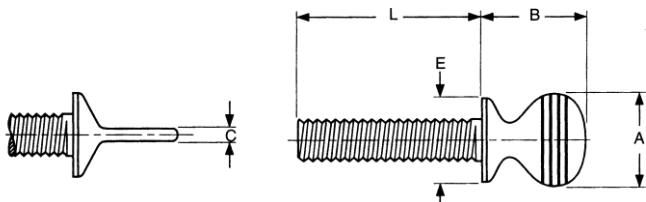

SHOULDER PATTERN – TYPE S


Nominal Size or Basic Screw Diameter	Threads Per Inch	A		B		C		E		L	
		Max	Min								
6	32	0.31	0.29	0.33	0.31	0.05	0.04	0.25	0.23	0.75	0.25
8	32	0.36	0.34	0.38	0.36	0.06	0.05	0.31	0.29	0.75	0.38
10	24 & 32	0.42	0.40	0.48	0.46	0.06	0.05	0.35	0.32	1.00	0.38
12	24	0.48	0.46	0.54	0.52	0.06	0.05	0.40	0.38	1.00	0.38
1/4	20	0.55	0.52	0.64	0.61	0.07	0.05	0.47	0.44	1.50	0.50
5/16	18	0.70	0.67	0.78	0.75	0.09	0.07	0.59	0.56	1.50	0.50
3/8	16	0.83	0.80	0.95	0.92	0.11	0.09	0.76	0.71	2.00	0.75

DRIVE SCREWS
TYPE U
ROUND HEAD

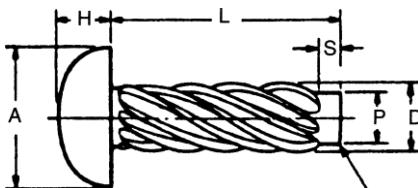

Nominal Screw Size	Number of Thread Starts	D		A		H		P		Recommended Hole Size		
		Outside Diameter		Head Diameter		Head Height		Pilot Diameter		Drill Size No.	Hole Diameter	
		Max	Min	Max	Min	Max	Min	Max	Min			
00	6	0.060	0.057	0.099	0.090	0.034	0.026	0.049	0.046	55	0.052	
0	6	0.075	0.072	0.127	0.118	0.049	0.041	0.063	0.060	51	0.067	
2	8	0.100	0.097	0.162	0.146	0.069	0.059	0.083	0.080	44	0.086	
4	7	0.116	0.112	0.211	0.193	0.086	0.075	0.096	0.092	37	0.104	
6	7	0.140	0.136	0.260	0.240	0.103	0.091	0.116	0.112	31	0.120	
7	8	0.154	0.150	0.285	0.264	0.111	0.099	0.126	0.122	29	0.136	
8	8	0.167	0.162	0.309	0.287	0.120	0.107	0.136	0.132	27	0.144	
10	8	0.182	0.177	0.359	0.334	0.137	0.123	0.150	0.146	20	0.161	
12	8	0.212	0.206	0.408	0.382	0.153	0.139	0.177	0.173	11	0.191	
14	9	0.236	0.242	0.457	0.429	0.170	0.155	0.202	0.198	2	0.221	
L		Nominal Screw Length		1/8	3/16	1/4	5/16	3/8	1/2	5/8	3/4	1" and
S		Pilot Length		0.047	0.047	0.047	0.047	0.062	0.062	0.078	0.078	0.125

COTTER PINS

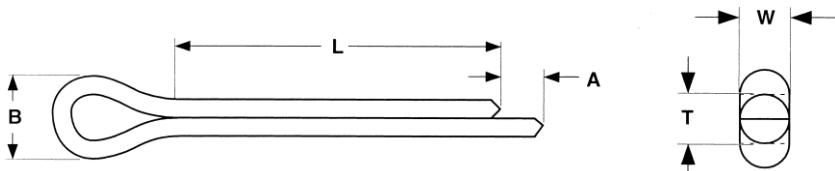





Nominal Size	Basic Pin Diameter	T		W		B	A	Gage Hole Diameter (± 0.001)
		Total Shank Diameter		Wire Width		Head Diameter	Extended Prong Length	
		Max	Min	Max	Min	Min	Min	
1/16	0.062	0.060	0.056	0.060	0.044	0.12	0.03	0.078
3/32	0.094	0.090	0.086	0.090	0.069	0.19	0.04	0.109
1/8	0.125	0.120	0.116	0.120	0.093	0.25	0.06	0.141
5/32	0.156	0.150	0.146	0.150	0.116	0.31	0.07	0.172
3/16	0.188	0.176	0.172	0.176	0.137	0.38	0.09	0.203
7/32	0.219	0.207	0.202	0.207	0.161	0.44	0.10	0.234
1/4	0.250	0.225	0.220	0.225	0.176	0.50	0.11	0.266
5/16	0.312	0.280	0.275	0.280	0.220	0.62	0.14	0.312
3/8	0.375	0.335	0.329	0.335	0.263	0.75	0.16	0.375
1/2	0.500	0.473	0.467	0.473	0.373	1.00	0.23	0.500

METRIC THREAD AND DIN# INFORMATION

	Standard Thread	Fine Thread	Extra Fine Thread
Size	Pitch	Pitch	Pitch
2mm	0.40	—	—
3mm	0.50	—	—
4mm	0.70	—	—
5mm	0.80	—	—
6mm	1.00	—	—
7mm	1.00	—	—
8mm	1.25	1.00	—
10mm	1.50	1.25	1.00
12mm	1.75	1.50	—
14mm	2.00	1.50	—
16mm	2.00	1.50	—
18mm	2.50	1.50	—
20mm	2.50	2.00	1.50
22mm	2.50	1.50	—
24mm	3.00	2.00	—
27mm	3.00	—	—
30mm	3.50	—	—
33mm	3.50	—	—
36mm	4.00	—	—

Din#	Description	
931	Coarse Thread Cap Screws	(Partially Threaded)
933	Coarse Thread Cap Screws	(Fully Threaded)
960	Fine Thread Cap Screws	(Partially Threaded)
961	Fine Thread Cap Screws	(Fully Threaded)
84	Cheese (Fillister) Machine Screws	(Slotted)
85	Pan Head Machine Screws	(Slotted)
963	Flat Head Machine Screws	(Slotted)
964	Oval Head Machine Screws	(Slotted)
966	Oval Head Machine Screws	(Phillips)
7985	Fillister Head Machine Screws	(Phillips)
125	Flat Washers	
127	Split Lock Washers	
6797	Tooth Lock Washers	
936	Jam Nuts	
934	Finished Hex Nuts	
985	Nylon Stop Nuts	
912	Socket Cap Screw	
439	Hex Jam Nut	
916	Socket Set Screw	

ANCHOR INFORMATION

Anchor	Type	Use In
	Concrete - Masonry Anchors	Concrete, Block, Brick & Masonry
	Drive Anchors	Concrete, Block & Brick
	Drop-In Anchors Steel & Stainless	Concrete & Stone
	E-Z Toggle Anchors	Wallboard
	Hollow Wall Anchors	Wallboard, Hollow Plaster & Tile Block
	Lag Screw Shields	Mortar Joint or Concrete
	Machine Screw Anchors	Concrete, Brick & Stone
	Non-Drilling Anchors	Concrete, Brick & Stone
	One Step Wallboard Anchors	Wallboard
	Plastic Anchors	Concrete, Brick, Block & Stone
	Plastic Screw Anchors	Concrete, Brick, Block & Wallboard
	Polly Toggle Anchors	Wallboard or Solid Masonry
	Self-Drilling Shields	Concrete
	Sleeve Anchors	Concrete, Stone & Brick
	Stud Anchors	Concrete, Brick & Stone
	Toggle Bolts	Hollow block, Wallboard & Plaster
	Wedge Anchors	Concrete or Stone
	Wood Screw Shields	Concrete, Block & Brick

ANCHOR DRILLING INFORMATION

Description	Diameter of Anchor	Drill Hole Size	Diameter of Anchor	Drill Hole Size
Drop in Anchors	1/4	3/8	5/8	7/8
	3/8	1/2	3/4	1
	1/2	5/8		
Lag Shields	1/4	1/2	1/2	3/4
	5/16	1/2	5/8	7/8
	3/8	5/8	3/4	1
Lead Wood Screw Anchors	#6	1/4	#16	3/8
	#10	5/16		
Lead Machine Screw Anchors, Single	6/32	5/16	3/8	3/4
	8/32	5/16	1/2	7/8
Expansion Shields & Double Expansion Shields	10/24	3/8	5/8	1 1/8
	1/4	1/2	3/4	1 1/4
	5/16	5/8		
Plastic Conical Anchors	6-8	3/16	10-12	1/4
	8-10	3/16	14-16	5/16
Toggle Bolts	1/8	3/8	5/16	7/8
	3/16	1/2	3/8	1
	1/4	5/8	1/2	1 1/4
Hollow Wall Anchors	1/8 - All Sizes	5/16	1/4 - S	7/16
	3/16-S	3/8	1/4 - L	7/16
	3/16-L	3/8	1/4 - XL	1/2
	3/16-XL	7/16		

Nail Drives Nylon Nail Anchors Sleeve Anchors Split Drive Anchors Wedge Anchors	Drill hole is the same as the diameter of the anchor product.
Hollow Wall Drive Anchors	No Drilling Required
Plastic Drive Anchors	No Drilling Required

